


# GSD30060

## 650V Silicon Carbide Schottky Diode



### Features

- High surge current capability
- No reverse recovery
- Positive Temperature Coefficient
- Easy to paralleling
- Pb-free lead plating / RoHS compliant



### Applications

- Free Wheeling Diodes in Inverter stages
- Power factor correction
- Data Center
- Switch mode power supply

### Benefits

- High-speed switching
- Low heat dissipation requirements
- Reduce size and cost of the system
- High-reliability
- System efficiency improvement

### Die Information

Wafer Size	150 mm
Die Size	2988 × 2988 $\mu\text{m}^2$ (exclude SL)
Scribe Line Size	80 $\mu\text{m}$
Die Thickness	175 $\mu\text{m}$
Anode Pad Opening Size;	2738 × 2738 $\mu\text{m}^2$
Gross Die	1684 ea
Top Metallization	Al, 4 $\mu\text{m}$
Back Metallization	Ti/Ni/Ag, 2.5 $\mu\text{m}$
Frontside Passivation	Polyimide
Wire Bond	Al, 15mil×2 (recommend)

# GSD30060

## 650V Silicon Carbide Schottky Diode

### Electrical Characteristics (Wafer Type)

#### Maximum Ratings<sup>\*2</sup> (Tc=25°C unless otherwise noted)


Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		650	V
$I_F$	Continuous forward current	Tc=148°C	30	A
$I_{FSM}$	Non-repetitive forward surge current	t <sub>p</sub> =10ms, Half sine pulse	234	A
$I_{FRM}$	Repetitive Peak Forward Surge Current	t <sub>p</sub> =10ms, Half sine pulse	205	A

\*2. Based on TO-247-2 package

#### Static Electrical Characteristics (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
$V_R$	Reverse blocking voltage	$I_R=100\mu A$	650	-	-	V
$I_R$	Reverse current	$V_R=650V$	-	7	100	uA
$V_F$	Forward voltage	$I_F=15A$	-	1.20	-	V
		$I_F=30A$	-	1.42	1.6	V

#### Die Layout (Unit : um)

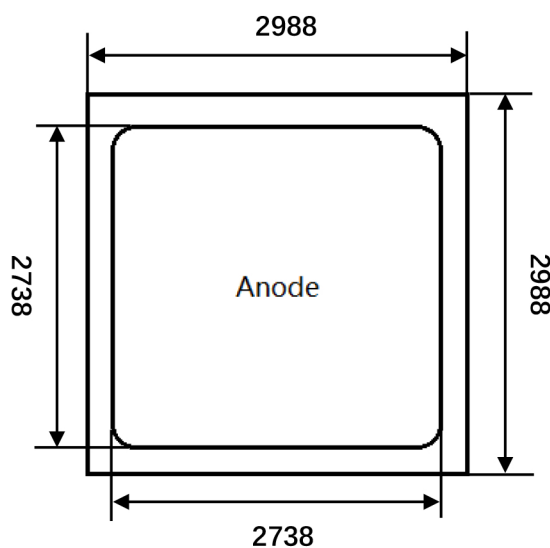

# GSD30060

## 650V Silicon Carbide Schottky Diode

### Announcement

Information in this document is believed to be accurate and reliable. However, GLOSIC does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

### Right to Make Changes

GLOSIC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.



[www.globalsic.com.cn](http://www.globalsic.com.cn)