


# GSD02120

## 1200V Silicon Carbide Schottky Diode



### Features

- Negligible reverse recovery
- High surge current
- Positive temperature coefficient
- Higher frequency
- Halogen-free / RoHS compliant



### Applications

- SMPS
- Solar inverter
- Data Center
- UPS

### Benefits

- ◆ High-speed switching
- ◆ Low heat dissipation requirements
- ◆ Reduce size and cost of the system
- ◆ High-reliability

### Die Information

Wafer Size	150 mm
Die Size	1200 × 1200 $\mu\text{m}^2$ (exclude SL)
Scribe Line Size	60 $\mu\text{m}$
Die Thickness	175 $\mu\text{m}$
Anode Pad Opening Size;	873 × 873 $\mu\text{m}^2$
Gross Die	10205 ea
Top Metallization	Al
Back Metallization	Ti/Ni/Ag
Frontside Passivation	Polyimide
Wire Bond	Al, 10mil×1 (recommend)

# GSD02120

## 1200V Silicon Carbide Schottky Diode

### Electrical Characteristics (Wafer Type)

#### Maximum Ratings<sup>\*2</sup> (Tc=25°C unless otherwise noted)


Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		1200	V
$I_F$	Continuous forward current	Tc=165°C	2	A
$I_{FSM}$	Non-repetitive forward surge current	t <sub>p</sub> =10ms, Half sine pulse	19	A
$I_{FRM}$	Repetitive Peak Forward Surge Current	t <sub>p</sub> =10ms, Half sine pulse	18	A

\*2. Based on TO-252-2 package

### Static Electrical Characteristics (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
$V_R$	Reverse blocking voltage	Tc=25°C	1200	-	-	V
$I_R$	Reverse current	$V_R=1200V$ , Tc=25°C	-	1.0	50	μA
$V_F$	Forward voltage	$I_F=1A$ , Tc=25°C	-	1.17	-	V
		$I_F=2A$ , Tc=25°C	-	1.38	1.60	V

### Die Layout (Unit : μm)

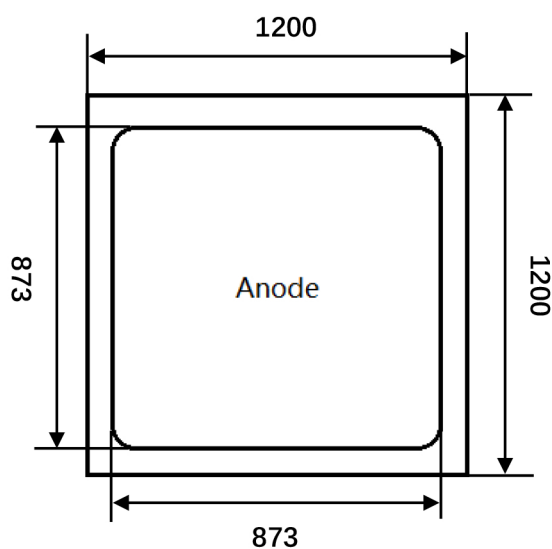

# GSD02120

## 1200V Silicon Carbide Schottky Diode

### Announcement

Information in this document is believed to be accurate and reliable. However, GLOSIC does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

### Right to Make Changes

GLOSIC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.



[www.globalsic.com.cn](http://www.globalsic.com.cn)