


GSD04060

650V Silicon Carbide Schottky Diode



Features

- Negligible reverse recovery
- High surge current
- Temperature independent switching behavior
- No reverse recovery/ No forward recovery
- Halogen-free / RoHS compliant



Applications

- Switch mode power supply
- Solar inverter
- Data Center
- Uninterruptible power supply

Benefits

- High-speed switching
- Low heat dissipation requirements
- Reduced EMI
- High-reliability

Die Information

Wafer Size	150 mm
Die Size	1200 × 1200 μm^2 (exclude SL)
Scribe Line Size	60 μm
Die Thickness	175 μm
Anode Pad Opening Size;	950.4 × 950.4 μm^2
Gross Die	10275 ea
Top Metallization	Al, 4 μm
Back Metallization	Ti/Ni/Ag, 2.5 μm
Frontside Passivation	Polyimide
Wire Bond	Al, 15mil×1 (recommend)

GSD04060

650V Silicon Carbide Schottky Diode

Electrical Characteristics (Wafer Type)

Maximum Ratings*² (T_c=25°C unless otherwise noted)


Symbol	Parameter		Value	Unit
V _{RRM}	Repetitive peak reverse voltage		650	V
I _F	Continuous forward current	T _c =155°C	4	A
I _{FSM}	Non-repetitive forward surge current	t _p =10ms, Half sine pulse	42	A
I _{FRM}	Repetitive Peak Forward Surge Current	t _p =10ms, Half sine pulse	37	A

*2. Based on DFN5*6 package

Static Electrical Characteristics (T_c=25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
V _R	Reverse blocking voltage	I _R =50uA	650	-	-	V
I _R	Reverse current	V _R =650V	-	1.1	50	uA
V _F	Forward voltage	I _F =2A	-	1.16	-	V
		I _F =4A	-	1.36	1.5	V

Die Layout (Unit : um)

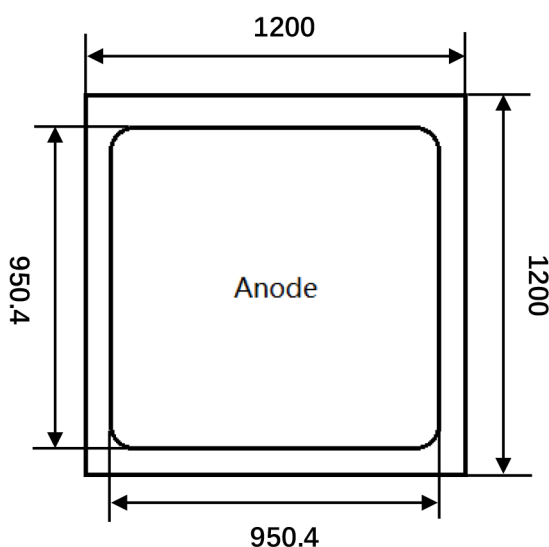

GSD04060

650V Silicon Carbide Schottky Diode

Announcement

Information in this document is believed to be accurate and reliable. However, GLOSIC does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

GLOSIC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.



www.globalsic.com.cn